



Xiamen MJ Industrial Tech Co.,Ltd

Cable Management Products

2019-2020

One-Step Cable and Wire Management Solution Products Supplier

About MJ

MJ is one-step supplier of all kinds cable management solution products, which relentless in pursuing the latest technology of products and in providing the best possible user experience. We design, develop, manufacture, and promote our own product to assure customers of reliable, cost-effective but the high quality products possible.

We offers a wide range of cable management solution products,including expandable braided sleeve,side entry sleeve,heat shrink tube,wire loom,fiberglass sleeve,special sleeve,advanced sleeve,hook and loop straps,temeinal block etc.

MJ forms a strong team with technical knowledge, market know-how, product innovation and customer support. We understand that many companies today rely on committed partners that can offer products and solutions that save installation time, reduce risk and last for many years, and who can also can act as a trusted adviser. Our aim is to position ourselves as that important and strong partner for our clients and we work hard to keep our promises.



Why Choose Us

One Step Solutions

You can find all cable management products here, save time, save cost

High Productiveness

Product quality control and total respect of delivery times

100% QC Passed

Most advanced products, the widest selections, the most knowledgeable customer service and the best value to our customers.

Our Cooperation Partner



COMMSCOPE®



LEONI



Raychem®

PET Expandable Sleeve

Features

1. Extremely lightweight
2. Keeps its flexibility under a wide range of temperatures
3. Made of polyester
4. Economical & Easy To Install
5. Resists Gasoline, chemicals & Cleaning Solvents
6. Expands Up to 150% of Initial Diameter
7. Cut & Abrasion Resistant

DATA SHEET

PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-PEBS003	1/8"	3	0.25	1	6	1000
MJ-PEBS006	1/4"	6		3	9	500
MJ-PEBS008	5/16"	8		5	12	350
MJ-PEBS010	3/8"	10		7	17	350
MJ-PEBS012	1/2"	12		8	20	300
MJ-PEBS015	5/8"	15		10	27	250
MJ-PEBS020	3/4"	20		14	30	200
MJ-PEBS025	1"	25		18	33	200
MJ-PEBS032	1-1/4"	32		20	50	150
MJ-PEBS038	1-1/2"	38		30	60	100
MJ-PEBS045	1-3/4"	45		35	75	100
MJ-PEBS050	2"	50		40	80	100
MJ-PEBS064	2-1/2"	64		45	105	100
MJ-PEBS076	3"	76		64	120	100



Physical Properties

Material: PET Monofilament

Working Temperature: -70°C to 125°C

Melt Point: 260°C

Flammability: VW-1

Standard Color: Black, Gray, White

Certification: ROHS, Reach, Halogen free, UL, CSA

Cutting Tool: Hot Knife



UL94 V0 Flame Retardant PET Expandable Sleeve

Features

1. UL94 V0 flame retardant ratio
2. Extremely lightweight
3. Keeps it's flexibility under a wide range of temperatures
4. Made of polyester
5. Economical & Easy To Install
6. Resists Gasoline, chemicals & Cleaning Solvents
7. Expands Up to 150% of Initial Diameter
8. Cut & Abrasion Resistant



DATA SHEET

PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-HPEBS003	1/8"	3	0.25	1	6	1000
MJ-HPEBS006	1/4"	6		3	9	500
MJ-HPEBS008	5/16"	8		5	12	350
MJ-HPEBS010	3/8"	10		7	17	350
MJ-HPEBS012	1/2"	12		8	20	300
MJ-HPEBS015	5/8"	15		10	27	250
MJ-HPEBS020	3/4"	20		14	30	200
MJ-HPEBS025	1"	25		18	33	200
MJ-HPEBS032	1-1/4"	32		20	50	150
MJ-HPEBS038	1-1/2"	38		30	60	100
MJ-HPEBS045	1-3/4"	45		35	75	100
MJ-HPEBS050	2"	50		40	80	100
MJ-HPEBS064	2-1/2"	64		45	105	100
MJ-HPEBS076	3"	76		64	120	100

Physical Properties

Material:PET Monofilament

Working Temperature:-70°C to 125°C

Melt Point:260°C

Flammability:UL94 V0

Standard Color:Black, Gray, White

Certification:ROHS, Reach, Halogen free, UL, CSA

Cutting Tool:Hot Knife



Clean Cut Expandable Sleeve

Features

- 1.Expands Up to 150% or More
- 2.Cuts Easily With Scissors
- 3.Provides Professional Look on Products
- 4.Resists Common Chemicals, Solvents, and UV Damage
- 5.Economical and Easy to Install
- 6.Abrasion Resistant
- 7.Flame Retardant
- 8.Halogen Free - RoHS Compliant

DATA SHEET						
PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-CCS003	1/8"	3	0.25	1	6	1000
MJ-CCS006	1/4"	6		3	9	500
MJ-CCS008	5/16"	8		5	12	350
MJ-CCS010	3/8"	10		7	17	350
MJ-CCS012	1/2"	12		8	20	300
MJ-CCS015	5/8"	15		10	27	250
MJ-CCS020	3/4"	20		14	30	200
MJ-CCS025	1"	25		18	33	200
MJ-CCS032	1-1/4"	32		20	50	150
MJ-CCS038	1-1/2"	38		30	60	100
MJ-CCS045	1-3/4"	45		35	75	100
MJ-CCS050	2"	50		40	80	100
MJ-CCS064	2-1/2"	64		45	105	100
MJ-CCS076	3"	76		64	120	100



Physical Properties

Material:PET Monofilament

Working Temperature:-70°C to 125°C

Melt Point:260°C

Flammability:VW-1

Standard Color:Black, Gray, White

Certification:ROHS, Reach, Halogen free, UL, CSA

Cutting Tool:Scissor



Nylon Expandable Braided Sleeve

Features

1. Lightweight and flexible for ultimate protection
2. Sleeving expands up to 150% to fit over most connectors
3. Resists automotive fluids to keep engines safe
4. Cut & abrasion resistant to protect hoses from excessive wear
5. UV resistant for outdoor usage
6. RoHS Compliant



DATA SHEET

PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-PABS003	1/8"	3	0.20	1	6	1000
MJ-PABS006	1/4"	6		3	9	500
MJ-PABS008	5/16"	8		5	12	350
MJ-PABS010	3/8"	10		7	17	350
MJ-PABS012	1/2"	12		8	20	300
MJ-PABS015	5/8"	15		10	27	250
MJ-PABS020	3/4"	20		14	30	200
MJ-PABS025	1"	25		18	33	200
MJ-PABS032	1-1/4"	32		20	50	150
MJ-PABS038	1-1/2"	38		30	60	100
MJ-PABS045	1-3/4"	45		35	75	100
MJ-PABS050	2"	50		40	80	100
MJ-PABS064	2-1/2"	64		45	105	100
MJ-PABS076	3"	76		64	120	100

Physical Properties

Material:PA66 Monofilament

Working Temperature:-60°C to 160°C

Melt Point:260°C

Flammability:VW-1

Standard Color:Black, Gray, White

Certification:ROHS, Reach, Halogen free, UL, CSA

Cutting Tool:Hot Knife



PPS Expandable Braided Sleeve

Features

- 1.Ultra lightweight and flexible for ultimate protection
- 2.Ultra abrasion resistant
- 3.UL 94 V0 Approved
- 4.Virtually Impervious to Chemical Damage
- 5.Expands Up to 150%
- 6.Cuts Easily With Hot Knife

DATA SHEET						
PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-PPSS003	1/8"	3	0.20	1	6	1000
MJ-PPSS006	1/4"	6		3	9	500
MJ-PPSS008	5/16"	8		5	12	350
MJ-PPSS010	3/8"	10		7	17	350
MJ-PPSS012	1/2"	12		8	20	300
MJ-PPSS015	5/8"	15		10	27	250
MJ-PPSS020	3/4"	20		14	30	200
MJ-PPSS025	1"	25		18	33	200
MJ-PPSS032	1-1/4"	32		20	50	150
MJ-PPSS038	1-1/2"	38		30	60	100
MJ-PPSS045	1-3/4"	45		35	75	100
MJ-PPSS050	2"	50		40	80	100
MJ-PPSS064	2-1/2"	64		45	105	100
MJ-PPSS076	3"	76		64	120	100



Physical Properties

Material:PPS Monofilament

Thickness:0.20mm

Working Temperature:-70°C to 200°C

Melt Point:285°C

Flammability:UL94 V0

Standard Color:Black

Certification:ROHS,Reach,Halogen free,UL,CSA

Cutting Tool:Hot Knife



Nylon Multifilament Braided Sleeve

Features

- 1.Excellent cut through and abrasion resistance
- 2.Soft fabric like feel
- 3.Virtually non-expandable
- 4.Available in a very wide variety of sizes to suit your needs
- 5.Halogen Free, ROHS compliant
- 6.Resists Gasoline, Engine Chemicals & Cleaning Solvents
- 7.Will not retain moisture, and resists microbial (mildew) growth - highly suitable for Marine applications.



DATA SHEET

PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-PAMS003	1/8"	3	1.00	2	4	350
MJ-PAMS006	1/4"	6		4	7	350
MJ-PAMS008	5/16"	8		5	9	350
MJ-PAMS010	3/8"	10		6	11	350
MJ-PAMS012	1/2"	12		8	13	300
MJ-PAMS016	5/8"	16		10	17	250
MJ-PAMS019	3/4"	19		12	20	200
MJ-PAMS023	8/9"	23		15	24	200
MJ-PAMS025	1"	25		16	26	200
MJ-PAMS032	1-1/4"	32		20	33	150
MJ-PAMS038	1-1/2"	38		24	39	100
MJ-PAMS050	2"	50		32	51	100
MJ-PAMS063	2-1/2"	63		40	64	100

Physical Properties

Material:PA66 Multifilament

Thickness:1.0mm

Working Temperature:-60°C to 160°C

Melt Point:260°C

Flammability:VW-1

Standard Color:Black

Certification:ROHS


Cutting Tool:Hot Knife



Nylon Flat Filament Braided Sleeve

Features

1. Braided from 0.20" Nylon Polyamide Monofilament
2. Provides Professional Look on Products
3. Resists Common Chemicals, Solvents, and UV Damage
4. Economical and Easy to Install
5. Cut and Abrasion Resistant
6. Special Heavy Duty Construction
7. Provides reliable full coverage
8. Halogen Free - RoHS Compliant

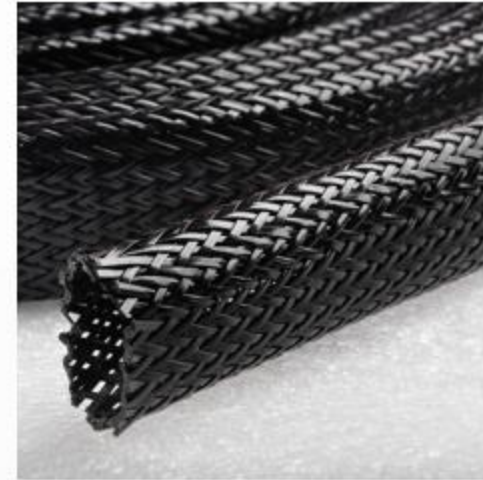

DATA SHEET

PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-NFBS008	5/16"	8	0.50	5	12	100
MJ-NFBS012	1/2"	12		9	16	100
MJ-NFBS019	3/4"	19		16	25	100
MJ-NFBS032	1-1/4"	32		25	42	100
MJ-NFBS045	1-3/4"	45		38	59	100
MJ-NFBS064	2-1/2"	64		45	60	100

Physical Properties

Material:PA66 Flat Filament

Thickness:0.5mm

Working Temperature:-60°C to 160°C

Melt Point:260°C

Flammability:VW-1

Standard Color:Black

Certification:ROHS

Cutting Tool:Hot Knife



Woven Split Tubular Harness Wrap

Features

- 1.25% edge overlap
- 2.Halogen Free - RoHS Compliant
- 3.Provides Professional Look on Products
- 4.Resists Common Chemicals, Solvents, and UV Damage
- 5.Cut and Abrasion Resistant
- 6.Split to allow breakouts and easy access
- 7.Woven material provides extra protection



DATA SHEET

PART NO	NOMINAL SIZE		OVERLAP	MAX BUNDLE DIA (MM)	PACKING (M/SPOOL)
	INCH	MM			
MJ-STHW003	1/8"	3	25% OR 50%	4	100
MJ-STHW005	1/4"	5		6	100
MJ-STHW008	5/16"	8		9	100
MJ-STHW009	3/8"	10		11	50
MJ-STHW013	1/2"	13		14	50
MJ-STHW016	5/8"	16		17	25
MJ-STHW019	3/4"	19		20	25
MJ-STHW025	1"	25		27	25
MJ-STHW029	1-1/8"	29		31	25
MJ-STHW032	1-1/4"	32		34	25
MJ-STHW038	1-1/2"	38		40	25
MJ-STHW050	2"	50		52	25

Physical Properties

Material:PET multifilament+monofilament

Working Temperature:-60°C to 160°C

Melt Point:260°C

Flammability:UL94 V0

Standard Color:Black

Certification:ROHS,Reach,Halogen free,UL,CSA,DIN5510

Cutting Tool:Hot Knife



Semi-Rigid Split Braided Tube

Features

- 1.25% edge overlap
- 2.Halogen Free - RoHS Compliant
- 3.Provides Professional Look on Products
- 4.Resists Common Chemicals, Solvents, and UV Damage
- 5.Cut and Abrasion Resistant
- 6.Split to allow breakouts and easy access



DATA SHEET

PART NO	NOMINAL SIZE		OVERLAP	MAX BUNDLE DIA (MM)	PACKING (M/SPOOL)
	INCH	MM			
MJ-SPBS003	1/8"	3	25% OR 50%	4	100
MJ-SPBS006	1/4"	6		7	100
MJ-SPBS009	3/8"	9		10	50
MJ-SPBS013	1/2"	13		14	50
MJ-SPBS016	5/8"	16		17	25
MJ-SPBS019	3/4"	20		20	25
MJ-SPBS025	1"	25		26	25
MJ-SPBS032	1-1/4"	32		33	25
MJ-SPBS038	1-1/2"	38		40	25
MJ-SPBS050	2"	50		52	25

Physical Properties

Material:PET monofilament

Overlap:25% or 50%

Working Temperature:-60°C to 160°C

Melt Point:260°C

Flammability:UL94 V0

Standard Color:Black, Gray, White

Certification:ROHS, Reach, Halogen free, UL

Cutting Tool:Hot Knife



Wave Self Closing Braided Wrap

Features

Wave self closing wrap is a new type of self-closing wrap, consist of special modified monofilament and multifilament yarns. It has excellent flame and abrasion resistance, noise reduction, easy installation.

The special open structure provides easy removal when is necessary an inspection or maintenance of wire harnesses.



DATA SHEET

PART NO	SIZE(ID)	OVERLAP	MAX BUNDLE DIA (MM)	PACKING
	MM			(M/SPOOL)
MJ-WSBS006	6	50%	7	100
MJ-WSBS010	10		11	100
MJ-WSBS012	12		13	100
MJ-WSBS017	17		19	50
MJ-WSBS023	23		25	25
MJ-WSBS028	28		30	25
MJ-WSBS036	36		40	25
MJ-WSBS050	50		55	25

Physical Properties

Material:PET multifilament+monofilament

Overlap:50%

Working Temperature:-50°C to 150°C

Melt Point:240°C+(-) 10°C

Flammability:UL94 V1

Standard Color:Black

Certification:ROHS,Reach,Halogen free,UL

Cutting Tool:Hot Knife/Scissor



Silent Braided Wrap

Features

- 1.Woven by polyester monofilament and multifilament
- 2.Offers excellent reduction of noise.
- 3.Side entry design makes it easy to install, remove, and reuse for wire harness or cables.
- 4.Especially suitable for difficult installed areas such as door panels or dashboards.
- 5.Most commonly used on wires harness and cable assemblies providing a tough, durable protection and noisy reduction in the automotive, railway, industrial machinery fields.



DATA SHEET

PART NO	Inner Diameter	OVERLAP	MAX BUNDLE DIA (MM)	PACKING
	mm			(M/SPOOL)
MJ-RSCW005	5	25%	6	200
MJ-RSCW009	9		10	100
MJ-RSCW013	13		14	50
MJ-RSCW019	19		20	25
MJ-RSCW025	25		26	25
MJ-RSCW032	32		33	25

Physical Properties

Material: Polyester monofilament and multifilament

Operating: -50°C -+ 150°C

Melt Point: 240±10°C

Flammability: VW-1

Standard Color: Black

Certification: ROHS, Halogen free

Cutting Tool: Hot knife




Polyester Self-closing Wrap

Features

- 1.Woven by UL94 V0 polyester monofilament
- 2.Offers excellent flame resistance, heat dispersion and durable protection
- 3.The special open structure provides easy removal when an inspection or maintenance of wire harness is necessary
- 4.Most commonly be used in railway and automotive where the wire harness and hoses need high flame retardant, heat dispersion and durable protection

DATA SHEET

PART NO	Inner Diameter	OVERLAP	MAX BUNDLE DIA (MM)	PACKING
	mm			(M/SPOOL)
MJ-SSCP005	5	75%	6	100
MJ-SSCP008	8		9	100
MJ-SSCP013	13		14	100
MJ-SSCP019	19		20	50
MJ-SSCP025	25		26	25
MJ-SSCP029	29		30	25
MJ-SSCP038	38		40	25

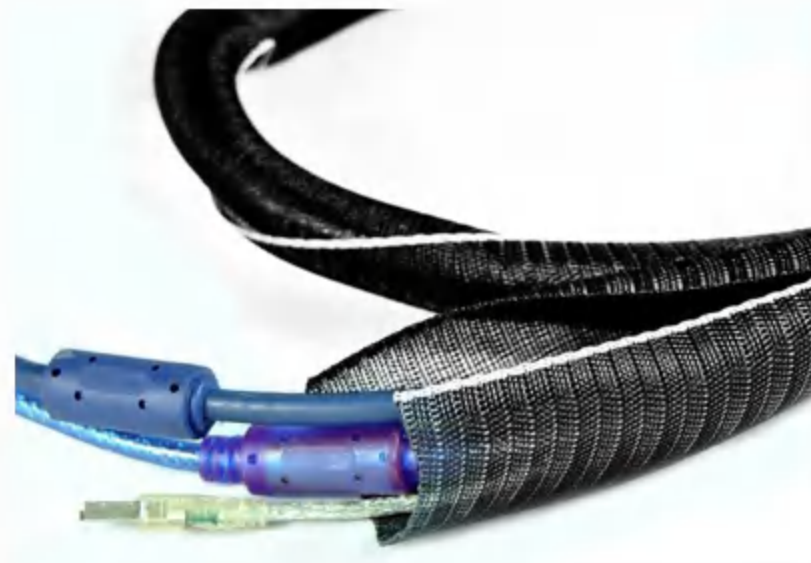

Physical Properties

Material:Polyester
Operating range:-50°C -+ 150°C
Melt Point:240±10°C
Flammability:VW-1, DIN5510
Standard Color:Black
Certification:ROHS, Halogen free
Cutting Tool:Hot knife, Scissors



Zipper Braided Sleeve Cable Wrap

Features

1. Bundles cables at any point along the run, easily avoiding large connectors and plugs for quick and easy installation
2. Zipper provides maximum security for cables, unlike other side-entry or split braided sleeving that can easily be removed by accident
3. Heavy duty polyester construction ensures great durability
4. Ideal for quick and easy cable management in homes, offices, and even industrial facilities



DATA SHEET

PART NO	NOMINAL SIZE	SPREAD WIDTH	MAX BUNDLE DIA (MM)	PACKING
	ID(MM)			(M/L)
MJ-ZCTW020	20	73	22	Customized Length
MJ-ZCTW025	25	88	27	
MJ-ZCTW030	30	104	32	
MJ-ZCTW035	35	120	37	
MJ-ZCTW040	40	135	42	
MJ-ZCTW045	45	151	47	
MJ-ZCTW050	50	170	52	
MJ-ZCTW060	60	198	62	

Physical Properties

Wrap Material:PET multifilament+monofilament

Zipper Material:Nylon

Working Temperature:-50°C to 150°C

Melt Point:250°C

Flammability:VW-2

Standard Color:Black, Gray, White

Certification:ROHS, Reach



Zipper Expandable Cable Sleeving

Features

1. Bundles cables at any point along the run, easily avoiding large connectors and plugs for quick and easy installation
2. Zipper provides maximum security for cables, unlike other side-entry or split braided sleeving that can easily be removed by accident
3. Heavy duty polyester construction ensures great durability
4. Ideal for quick and easy cable management in homes, offices, and even industrial facilities



DATA SHEET

PART NO	NOMINAL SIZE	SPREAD WIDTH	MAX BUNDLE DIA (MM)	PACKING
	ID(MM)			(M/L)
MJ-ZBW020	20	73	30	Customized Length
MJ-ZBW025	25	88	37	
MJ-ZBW030	30	104	45	
MJ-ZBW035	35	120	52	
MJ-ZBW040	40	135	60	
MJ-ZBW045	45	151	67	
MJ-ZBW050	50	170	75	
MJ-ZBW060	60	198	90	

Physical Properties

Wrap Material:PET monofilament

Zipper Material:Nylon

Working Temperature:-50°C to 150°C

Melt Point:250°C

Flammability:VW-2

Standard Color:Black, Gray, White

Certification:ROHS, Reach



Zipper Shielding Wrap

Features

- 1.Consists of a highly flexible tinned copper shielding mesh
- 2.Using an internal shield overlap, a grounding strap and a heavy duty zipper wrap.
- 3.Providing excellent EMI shielding
- 4.Being anti-noisy, flame-retardant and anti-abrasion
- 5.Widely used in communication system, electronic medical equipments and military equipments.



DATA SHEET

PART NO	NOMINAL SIZE	MAX BUNDLE DIA (MM)	PACKING
	ID(MM)		(M/L)
MJ-ZECW016	16	10~16	Customized Length
MJ-ZECW020	20	17~20	
MJ-ZECW030	30	21~30	
MJ-ZECW050	50	31~50	

Physical Properties

Material:Polyester multifilament+Copper Shield Mesh

Operating range:-50°C to 150°C

Melt Point:240±10°C

Flammability:DIN5510

Standard Color:Black

Certification:ROHS, Halogen free



Hook and Loop Braided Flexo Cable Wrap Sleeving

Features

1. Braided from polyester multifilament
2. Halogen Free - RoHS Compliant
3. Provides Professional Look on Products
4. Resists Common Chemicals, Solvents, and UV Damage
5. Economical and Easy to Install
6. Cut and Abrasion Resistant
7. Hook and Loop structure provide easy fastening
8. Expands to fit in-line connectors as oil, Salt Water, and Engine Chemicals
10. Deflects High Pressure Hose Ruptures



Physical Properties

Wrap Material: PET multifilament+monofilament

Velcro Material: Nylon

Working Temperature: -50°C to 150°C

Melt Point: 250°C

Flammability: VW-2

Standard Color: Black

Certification: ROHS, Reach

DATA SHEET				
PART NO	NOMINAL SIZE	SPREAD WIDTH	MAX BUNDLE DIA (MM)	PACKING
	ID(MM)			(M/SPOOL)
MJ-VMW020	20	80	22	50m/ROLL 25m/ROLL Or Customized Length
MJ-VMW025	25	95	27	
MJ-VMW030	30	115	32	
MJ-VMW035	35	130	37	
MJ-VMW040	40	146	42	
MJ-VMW045	45	162	47	
MJ-VMW050	50	178	52	
MJ-VMW060	60	210	62	



Hook and Loop Shielding Wrap

Features

- 1.Consists of a highly flexible tinned copper shielding mesh
- 2.Using an internal shield overlap, a grounding strap and hook and loop structure provide easy fastening .
- 3.Providing excellent EMI shielding
- 4.Being anti-noisy, flame-retardant and anti-abrasion
- 5.Most commonly used in railways, automotive, where the wire harnesses need EMI shielding and durable protection



DATA SHEET

PART NO	NOMINAL SIZE	MAX BUNDLE DIA (MM)	PACKING
	ID(MM)		(M/L)
MJ-HLSW010	10	6~10	50m/spool or 25m/spool
MJ-HLSW016	16	10~16	
MJ-HLSW020	20	17~20	
MJ-HLSW030	30	21~30	
MJ-HLSW050	50	31~50	

Physical Properties

Wrap Material:Polyester multifilament+Copper Shield Mesh

Velcro Material:Polyamide

Operating Temperature:-50℃ to 125℃

Melt Point:240±10℃

Flammability:DIN5510

Standard Color:Black

Certification:ROHS, Halogen free

Cutting tool: Scissors



Hook and Loop Braided Wrap

Features

1. Braided from 0.10" PET Monofilament Yarns
2. Halogen Free - RoHS Compliant
3. Provides Professional Look on Products
4. Resists Common Chemicals, Solvents, and UV Damage
5. Economical and Easy to Install
6. Cut and Abrasion Resistant
7. Hook and Loop structure provide easy fastening
8. Expands to fit in-line connectors



DATA SHEET			
PART NO	NOMINAL SIZE	MAX BUNDLE DIA (MM)	PACKING
	FALT WIDTH(MM)		(M/SPOOL)
MJ-VCBW013	13	8	50M 25M
MJ-VCBW019	19	12	
MJ-VCBW032	32	20	
MJ-VCBW051	51	32	
MJ-VCBW064	64	40	

Physical Properties

Wrap Material:PET monofilament

Velcro Material:Nylon

Working Temperature:-50°C to 150°C

Melt Point:250°C

Flammability:VW-2

Standard Color:Black

Certification:ROHS,Reach



PVC Reversible Button Cable Wrap

Features

- 1.Excellent insulation and abrasion resistance
- 2.Button Fasteners allows for cable breakouts
- 3.Reversible design allows choice of Grey or Black side to fit installation needs
- 4.Easy to install and remove
- 5.Cut with scissors
- 6.Widely used to protect wires of high and low voltage power converters and all kinds of mechanical equipment. Also used to protect automated devices



DATA SHEET

PART NO	SPREAD WIDTH (MM)	MAX.INSTALL I.D. (MM)	PACKING
			(M/SPOOL)
MJ-PBCW015	75	14	50
MJ-PBCW020	90	19	50
MJ-PBCW025	100	24	50
MJ-PBCW030	115	29	50
MJ-PBCW040	146	39	50
MJ-PBCW050	175	49	50
MJ-PBCW070	241	69	50
MJ-PBCW100	333	99	50

Physical Properties

Wrap Material:PVC

Working Temperature:-15°C to 85°C

Flammability:UL94 V0

Standard Color:Black/Gray,Gray/Gray

Certification:ROHS,Reach

Cutting Tool:Scissor



Polyethylene Spiral Wire Wrap

Features

1. Flexible, reusable, spiral design, polyethylene material.
2. It organizes and protects wires
3. Can easily be cut off to the length you need
4. Designed to allow breakouts of single/multiple wires.
5. Great for harnessing multiple cables into a single manageable bundle.
6. Can protect cables from possible damages
7. Ideal for bundling cables behind your PC, TV, home cinema system or your desk, for wiring looms etc.



DATA SHEET					
PART NO	SIZE		Thread Pitch W(mm)	Wrapping Range (mm)	PACKING (M/SPOOL)
	ID (mm)	OD (mm)			
MJ-SCPE3.0	1.5	3.0	4.0	1.5*10	10m/spool
MJ-SCPE4.0	2.5	4.0	3.5	2*20	
MJ-SCPE6.0	4.0	6.0	7.0	4*50	
MJ-SCPE8.0	6.0	8.0	10.8	6*60	
MJ-SCPE10.0	7.5	10.0	11.4	7.5*60	
MJ-SCPE12.0	9.0	12.0	13.9	9*65	
MJ-SCPE14.0	11.0	14.0	14.5	12.5*60	
MJ-SCPE15.0	12.0	15.0	15.0	12*70	
MJ-SCPE16.0	13.0	16.0	16.0	13*85	
MJ-SCPE18.0	14.0	18.0	17.0	14*90	
MJ-SCPE19.0	15.0	19.0	18.2	15*100	
MJ-SCPE20.0	17.0	20.0	18.5	16*105	
MJ-SCPE22.0	18.0	22.0	19.0	18*110	
MJ-SCPE24.0	20.0	24.0	19.6	20*130	
MJ-SCPE26.0	22.0	26.0	20.0	22*135	
MJ-SCPE28.0	24.0	28.0	28.0	24*140	
MJ-SCPE30.0	26.0	30.0	43.0	26*150	

Physical Properties

Material: Polyethylene

Working Temperature: -30°C to 100°C

Flammability: None

Standard Color: Black, Nature

Certification: ROHS



Zip Spiral Cable Wrap

Features

1. Fun and colorful way to personalize your cable management
2. Harmless deterrent to protect cords from chewing pets
3. Quick & Simple To Install
4. Enhanced Protection From Abrasion
5. Will Not lose Coil Strength With Repeated Flexing
6. Easily Removed & Re-Applied
7. RoHS Compliant
8. Easily cuts with scissors without fraying for easy preparation
9. Ideal For Cable Management & Industrial Applications

DATA SHEET				
PART NO	NOMINAL SIZE	THICKNESS (MM)	MAX BUNDLE DIA (MM)	PACKING
	OD(MM)			(M/L)
MJ-ZPCW008	8	1~1.5	4.0~8.0	50M 25M OR Customized Length
MJ-ZPCW010	10	1~1.5	5.0~10.0	
MJ-ZPCW016	16	1~1.5	8.0~16.0	
MJ-ZPCW022	22	1~1.5	12.0~22.0	
MJ-ZPCW028	28	1~1.5	16.0~28.0	
MJ-ZPCW032	32	1~1.5	20.0~32.0	
MJ-ZPCW040	40	1~1.5	25.0~42.0	
MJ-ZPCW042	42	1~1.5	35.0~50.0	



Physical Properties

Material: Polyethylene

Working Temperature: -30°C to 100°C

Melt Point: 250°C

Flammability: None

Standard Color: Black, Gray, White

Certification: ROHS, Reach



ABS Cable Management Spine

Features

1. Designed to follow the movement of any adjustable desks / sit-stands, the cable tidy organizer can equally be used with regular fixed height desks
2. An attractive and practical way to keep your wiring neat and tidy.
3. The Cable Spine routes cables from floor to desk and provides mechanical protection and strain relief.
4. Snap-together interlink blocks with 5.07 inch diameter steel base plate; It comes with top hooking element to screw under top surface. The total height it's adjustable by manually adding / removing blocks.
5. The total height of the cable spine is mounted from the under desk to the floor.
6. The base is metal for added weight and stability while the spine itself is strong ABS.

Size

Base Dia:175mm
Spine Width:68mm
Spine Length:
80cm (32")
100cm (40")
128cm (50.40")

Length Adjustable!



Physical Properties

Material:ABS and Steel

Working Temperature:-30°C to 100°C

Flammability:None

Standard Color:Black, Silver, White

Certification:ROHS



ABS Vertebrae Spiral Cable Spine

Features

1. Material: Forged with high quality ABS material, it is sturdy and durable.
2. Attractive cable-management spine adjusts and bends to keep cables organized and out of view to keep your wiring neat and tidy.
3. The cable spine routes cables from floor to desk and provides mechanical protection and strain relief.
4. Protect cables from chewing pets/rats and cable pulling children.
5. Designed specially for height adjustable desks / sit-stand tables, bend or straighten naturally with the movement of the desk reduce or increase the length by removing / adding one or more interlocking blocks.

Size

75mm W*760mm L (15 joints)

Custom Length Available!



Physical Properties

Material:ABS

Working Temperature:-30°C to 100°C

Flammability:None

Standard Color:Black,Silver,White

Certification:ROHS



2:1 Woven Fabric Heat Shrink Tubing

Features

- 1.2:1 Shrink Ratio (shrinks to 1/2 its original diameter)
- 2.Up to 20% Longitudinal (lengthwise) shrinkage
- 3.Low shrink temperature (80°C) for safe installation onto heat sensitive substrates
- 4.Superior abrasion resistance over a wide temperature range, yet cuts easily with scissors
- 5.Halogen Free
- 6.Outstanding fluid resistance for moisture and splash protection
- 7.Chemical Resistance

DATA SHEET			
PART NO	UNSHRUNK DIAMETER	SHRUNK DIAMETER	PACKING
			(M/L)
MJ-FHSS010	10.0	5.0	100m/spool
MJ-FHSS012	12.0	6.0	100m/spool
MJ-FHSS020	20.0	10.0	100m/spool
MJ-FHSS025	25.0	12.5	100m/spool
MJ-FHSS030	30.0	15.0	100m/spool
MJ-FHSS034	34.0	17.0	100m/spool
MJ-FHSS040	40.0	20.0	100m/spool
MJ-FHSS050	50.0	25.0	100m/spool
MJ-FHSS060	60.0	30.0	100m/spool
MJ-FHSS070	70.0	35.0	100m/spool
MJ-FHSS080	80.0	40.0	100m/spool



Physical Properties

Material: Polyolefin and Polyester yarns

Shrink Ratio: 2:1

Working Temperature: -40°C to 125°C

Storage Temperature: ≤ 60°C

Minimum Shrink Temperature: 70°C

Recommended Shrink Temperature: 110°C ~ 185°C

Standard Color: Black

Certification: ROHS, Reach, Halogen free

Recommended Shrink Temperature: Hot Gun/Oven



Nylon Hydraulic Hose Protection Sleeve

Features

1. Constructed of tightly woven nylon filament
2. Resistant to abrasion, cuts, heat, and UV/ozone deterioration
3. Sleeving extends hose life and safely deflects high pressure oil spray in the event of a hose leak

DATA SHEET

PART NO	FLAT WIDTH (MM)	ID (MM)	THICKNESS (MM)	PACKING
				(M/L)
MJ-NHPS020	20.0	12.0	1.0	100m/spool
MJ-NHPS025	25.0	15.0	1.0	100m/spool
MJ-NHPS030	30.0	18.0	1.0	100m/spool
MJ-NHPS035	35.0	21.0	1.0	50m/spool
MJ-NHPS040	40.0	24.0	1.0	50m/spool
MJ-NHPS045	45.0	28.0	1.0	50m/spool
MJ-NHPS050	50.0	31.0	1.0	50m/spool
MJ-NHPS060	60.0	37.0	1.0	50m/spool
MJ-NHPS070	70.0	44.0	1.0	50m/spool
MJ-NHPS080	80.0	50.0	1.0	50m/spool
MJ-NHPS090	90.0	56.0	1.0	50m/spool
MJ-NHPS100	100.0	62.0	1.0	50m/spool
MJ-NHPS115	115.0	72.0	1.0	50m/spool
MJ-NHPS145	145.0	90.0	1.0	50m/spool
MJ-FHSS176	176.0	110.0	1.0	50m/spool
MJ-FHSS200	200.0	125.0	1.0	50m/spool



Physical Properties

Material:Nylon Multifilament

Thickness:1mm

Working Temperature:-60°C to 125°C

Melt Point:220+(-)10°C

Standard Color:Black

Certification:ROHS,MSHA,ISO6945

Cutting Tool:Hot knife/Scissor



Polyester Textile Hydraulic Hose Protection Sleeve

Features

- 1.Protects against physical abrasion, damage and deterioration
- 2.Meets ISO 6945 abrasion standards
- 3.Provides limits burst and containment protection
- 4.Extremely durable and flexible Nylon
- 5.Guaranteed to fit your specific application
- 6.Multiple round ID width available

DATA SHEET

PART NO	FLAT WIDTH (MM)	ID (MM)	THICKNESS (MM)	PACKING
				(M/L)
MJ-PHPS020	20.0	12.0	0.7	100m/spool
MJ-PHPS025	25.0	15.0	0.7	100m/spool
MJ-PHPS030	30.0	18.0	0.7	100m/spool
MJ-PHPS035	35.0	21.0	0.7	50m/spool
MJ-PHPS040	40.0	24.0	0.7	50m/spool
MJ-PHPS045	45.0	28.0	0.7	50m/spool
MJ-PHPS050	50.0	31.0	0.7	50m/spool
MJ-PHPS060	60.0	37.0	0.7	50m/spool
MJ-PHPS070	70.0	44.0	0.7	50m/spool
MJ-PHPS080	80.0	50.0	0.7	50m/spool
MJ-PHPS090	90.0	56.0	0.7	50m/spool
MJ-PHPS100	100.0	62.0	0.7	50m/spool
MJ-PHPS115	115.0	72.0	0.7	50m/spool
MJ-PHPS145	145.0	90.0	0.7	50m/spool
MJ-FHSS176	176.0	110.0	0.7	50m/spool
MJ-FHSS200	200.0	125.0	0.7	50m/spool



Physical Properties

Material: Polyester Multifilament

Thickness: 0.7mm

Working Temperature: -50°C to 150°C

Melt Point: 240+ (-) 10°C

Standard Color: Black

Certification: ROHS, MSHA, ISO6945

Cutting Tool: Hot knife/Scissor



Spiral Hose Guard

Features

1. Exceptional anti-crushing performance, stress cracking resistance, load bearing strength.
2. Resistant to acids, oils and solvents.
3. High abrasion resistance.
4. UV resistance
5. Proven in arduous conditions
6. Self lubricating to reduce wear on hoses and cables
7. Suitable for wrapping single or multiple hose bundles. Fit most types of hydraulic, pneumatic and industrial hose assemblies
8. Spiral design makes it easily fitted on site without removal of rubber hoses
9. Greatly extends the working life of hydraulic hoses

Physical Properties

Material: Modified Polypropylene

Working Temperature: -40°C to 105°C

Tensile strength: 25 Mpa at normal temperature

Standard Color: Black

Certification: ROHS

Cutting Tool: Scissor



DATA SHEET					
PART NO	ID (MM)	WALL THICKNESS		BUNDLING DIA (MM)	PACKING (M/L)
		T(MM)	t(MM)		
MJ-SWHP008	8.0	1.2	0.4	8.0-11.0	2M/PC
MJ-SWHP010	10.0	1.3	0.4	10.0-13.0	
MJ-SWHP012	12.0	1.5	0.5	12.0-15.0	
MJ-SWHP016	16.0	2.0	0.5	15.0-18.0	
MJ-SWHP018	19.0	2.0	0.5	18.0-21.0	
MJ-SWHP020	20.0	2.5	0.5	19.0-25.0	
MJ-SWHP025	25.0	2.5	0.7	23.0-29.0	
MJ-SWHP028	28.0	3.0	0.7	26.0-32.0	
MJ-SWHP030	30.0	3.0	1.0	28.0-35.0	
MJ-SWHP032	32.0	3.0	1.0	30.0-37.0	
MJ-SWHP035	35.0	3.5	1.0	32.0-40.00	
MJ-SWHP038	38.0	3.5	1.0	35.0-43.0	
MJ-SWHP042	42.0	3.5	1.0	39.0-47.0	
MJ-SWHP045	45.0	3.5	1.0	42.0-50.0	
MJ-SWHP050	50.0	3.5	1.2	46.0-55.0	
MJ-SWHP060	60.0	4.0	2.0	55.0-66.0	
MJ-SWHP074	74.0	4.4	2.2	68.0-70.0	
MJ-SWHP088	88.0	4.9	2.4	82.0-95.0	
MJ-SWHP100	100.0	5.2	2.5	94.0-110.0	



Stainless Braided Cable Sleeve

Features

- 1.Expands Up to 150%
- 2.Cuts Easily With Sheers
- 3.Will Not Discolor or Rust
- 4.Easy to Install
- 5.Great for Exterior Applications
- 6.Resists Abrasion
- 7.Resists Common Chemicals & Solvents
- 8.UV Resistant
- 9.High Melt Point: 1,454°C/ 2,650°F
- 10.Halogen Free



Physical Properties

Material:304 Stainless Steel Filament

Working Temperature:-40°C to 150°C

Melt Point: 1,454°C

Standard Color:Tinned Color

Certification:ROHS

Cutting Tool:Scissor

DATA SHEET

PART NO	NOMINAL SIZE		THICKNESS (MM)	EXPANDED RANGE		PACKING (M/SPOOL)
	INCH	MM		MIN.(I) (mm)	MAX.(O) (mm)	
MJ-STBS012	1/2"	12	0.63	6	16	100
MJ-STBS016	5/8"	16		10	20	100
MJ-STBS020	3/4"	19		12	20	100
MJ-STBS025	1"	25		20	32	100
MJ-STBS032	1-1/4"	32		25	38	100
MJ-STBS038	1-1/2"	38		32	45	50
MJ-STBS045	1-3/4"	45		38	57	50



Copper Foil Shielding Braided Sleeving

Features

1. Will not retain moisture
2. Resists Abrasion, Chemicals, and UV
3. EMI, RFI, and ESD protection
4. Cuts with Shears or Serrated Scissors
5. Provides Full Coverage
6. Can be used for grounding straps

DATA SHEET

PART NO	NOMINAL SIZE	EXPANDED RANGE		PACKING
	FLAT WIDTH(MM)	MIN.(I) (mm)	MAX.(O) (mm)	(M/SPOOL)
MJ-CFSS003	3.0	1	5	200
MJ-CFSS006	6.0	4	8	150
MJ-CFSS008	8.0	5	10	150
MJ-CFSS010	10.0	7	16	150
MJ-CFSS012	12.0	8	20	100
MJ-CFSS015	15.0	10	23	100
MJ-CFSS020	20.0	13	30	100
MJ-CFSS025	25.0	18	35	100
MJ-CFSS030	30.0	20	40	50
MJ-CFSS040	40.0	30	50	50
MJ-CFSS050	50.0	40	60	50



Physical Properties

Material: Copper Foil Filament

Working Temperature: -40°C to 150°C

Standard Color: Tinned Color

Certification: ROHS

Cutting Tool: Scissor



2:1 Polyolefin Heat Shrink Tubing

Features

- 1.2:1 Shrink Ratio (shrinks to ½ of its original Diameter)
- 2.Lengthwise Shrinkage Approximately 5-7% During Shrink Process
- 3.Meets ROHS,Reach,UL Requirements
- 4.Flame Retardant
- 5.High resistance To Chemicals & Oils
- 6.Typical applications include: Insulation, Wire Identification, Wire Bundling, Mechanical Protection, Color Coding, Lightweight Harnessing, Physical/Electrical Protection of Components, Strain Relief, and Solder Insulation.



DATA SHEET

PART NO	NOMINAL SIZE		SHRINK RATIO	RECOVERED		PACKING (M/SPOOL)
	ID(MM)	T(MM)		ID(MM)	T(MM)	
MJ-HSTS-0.6	0.60	0.15	2:1	0.30	0.28	200
MJ-HSTS-0.8	0.80	0.15		0.40	0.30	200
MJ-HSTS-1.0	1.00	0.18		0.50	0.36	200
MJ-HSTS-1.5	1.50	0.18		0.75	0.36	200
MJ-HSTS-2.0	2.00	0.20		1.00	0.40	200
MJ-HSTS-2.5	2.50	0.20		1.25	0.40	200
MJ-HSTS-3.0	3.00	0.20		1.50	0.40	200
MJ-HSTS-3.5	3.50	0.22		1.75	0.44	200
MJ-HSTS-4.0	4.00	0.25		2.00	0.50	200
MJ-HSTS-4.5	4.50	0.25		2.25	0.5	100
MJ-HSTS-5.0	5.00	0.25		2.50	0.50	100
MJ-HSTS-6.0	6.00	0.28		3.00	0.55	100
MJ-HSTS-7.0	7.00	0.28		3.50	0.55	100
MJ-HSTS-8.0	8.00	0.28		4.00	0.60	100
MJ-HSTS-9.0	9.00	0.30		4.50	0.60	100
MJ-HSTS-10.0	10.00	0.30		5.00	0.60	100

Physical Properties

Material:Polyethylene

Shrink Ratio:2:1

Working Temperature:-55°C to 125°C

Start Shrink Temperature:70°C

Longitudinal shrinkage:5%~7%

Flammability:VW-1

Standard Color:Black

Certification:ROHS,UL, Halogen Free

Cutting Tool:Scissor



3:1 Dual Wall Heat Shrink Tubing

Features

1. Adhesive Will Form Water Tight Seal When Cooled
2. 3:1 shrink ratio (shrinks to 1/3 its original diameter)
3. Lengthwise shrinkage Approximately 8% During Shrink Process
4. Meets ROHS, REACH UL & Halogenfree Requirements
5. Flame Retardant Jacket
6. High Resistance to Chemicals & Oils

DATA SHEET

PART NO	NOMINAL SIZE (MM)	SHRINK RATIO	RECOVERED		ADHESIVE THICKNESS (MM)	PACKING (M/LENGTH)
			ID(MM)	T(MM)		
MJ-HST3-3.2	3.20	3:1	1.00	1.00	0.40	200
MJ-HST3-4.8	4.80		1.60	1.10	0.40	100
MJ-HST3-6.4	6.40		2.00	1.20	0.50	100
MJ-HST3-7.9	7.90		2.70	1.40	0.50	100
MJ-HST3-9.5	9.50		3.20	1.40	0.50	50
MJ-HST3-12.7	12.70		4.20	1.70	0.50	1.22
MJ-HST3-015	15.00		5.00	1.80	0.60	1.22
MJ-HST3-19.1	19.10		6.30	2.00	0.60	1.22
MJ-HST3-25.4	25.40		8.50	2.10	0.60	1.22
MJ-HST3-030	30.00		10.20	2.20	0.60	1.22
MJ-HST3-039	39.00		13.50	2.40	0.60	1.22
MJ-HST3-050	50.00		17.00	2.70	0.70	1.22
MJ-HST3-064	64.00		21.00	3.00	0.70	1.22
MJ-HST3-075	75.00		25.00	3.20	1.00	1.22
MJ-HST3-090	90.00		30.00	3.30	1.00	1.22
MJ-HST3-100	100.00	34.00	3.50	1.20	1.22	
MJ-HST3-125	125.00	42.00	3.50	1.20	1.22	



MULTI-PURPOSE

Physical Properties

Material: Polyethylene With Hot Melt Adhesive

Shrink Ratio: 3:1

Working Temperature: -55°C to 125°C

Start Shrink Temperature: 70°C

Completely shrinking temperature: 125°C

Longitudinal shrinkage: 8%

Flammability: VW-1

Standard Color: Black

Certification: ROHS, UL, Halogen Free



4:1 Dual Wall Heat Shrink Tubing

Features

1. Adhesive Will Form Water Tight Seal When Cooled
2. 4:1 shrink ratio (shrinks to 1/4 its original diameter)
3. Lengthwise shrinkage Approximately 8% During Shrink Process
4. Meets ROHS, REACH, UL & Halogenfree Requirements
5. Flame Retardant Jacket
6. High Resistance to Chemicals & Oils

DATA SHEET						
PART NO	NOMINAL SIZE (MM)	SHRINK RATIO	RECOVERED		ADHESIVE THICKNESS (MM)	PACKING (M/LENGTH)
			ID(MM)	T(MM)		
MJ-HST4-004	4.00	4:1	1.00	1.00	0.40	200
MJ-HST4-006	6.00		1.50	1.10	0.40	100
MJ-HST4-008	8.00		2.00	1.50	0.50	50
MJ-HST4-012	12.00		3.00	1.70	0.50	1.22
MJ-HST4-016	16.00		4.00	2.00	0.50	1.22
MJ-HST4-020	20.00		5.00	2.30	0.60	1.22
MJ-HST4-024	24.00		6.00	2.50	0.60	1.22
MJ-HST4-032	32.00		8.00	2.80	0.70	1.22
MJ-HST4-052	52.00		13.00	3.00	0.70	1.22



Physical Properties

Material: Polyethylene With Hot Melt Adhesive

Shrink Ratio: 4:1

Working Temperature: -55°C to 125°C

Start Shrink Temperature: 70°C

Completely shrinking temperature: 125°C

Longitudinal shrinkage: 8%

Flammability: VW-1

Standard Color: Black

Certification: ROHS, UL, Halogen Free



Silicone Coated Fiberglass Sleeve

Features

- 1.High flexible routing
- 2.Extreme abrasion resistance
- 3.Superior electrical properties
- 4.Heat-set, cuts cleanly and will not fray
- 5.Easy to "pushback" and form over components, connections and cables
- 6.Non-corrosive and extremely fungus resistant

DATA SHEET					
PART NO	SIZE ID (mm)	THICKNESS (mm)			PACKING (M/SPOOL)
		1.5KV	2.5KV	4.0KV	
MJ-FGS-0.5	0.50	0.30	0.40	0.50	100
MJ-FGS-0.8	0.80	0.30	0.40	0.50	100
MJ-FGS-1.0	1.00	0.30	0.40	0.50	100
MJ-FGS-1.5	1.50	0.30	0.40	0.50	100
MJ-FGS-2.0	2.00	0.30	0.40	0.50	100
MJ-FGS-2.5	2.50	0.30	0.40	0.50	100
MJ-FGS-3.0	3.00	0.35	0.40	0.50	100
MJ-FGS-3.5	3.50	0.35	0.45	0.50	100
MJ-FGS-4.0	4.00	0.35	0.45	0.50	100
MJ-FGS-4.5	4.50	0.40	0.45	0.50	100
MJ-FGS-5.0	5.00	0.40	0.45	0.50	100
MJ-FGS-5.5	5.50	0.40	0.45	0.60	100
MJ-FGS-6.0	6.00	0.45	0.50	0.60	100
MJ-FGS-7.0	7.00	0.45	0.50	0.60	100
MJ-FGS-8.0	8.00	0.50	0.60	0.70	50
MJ-FGS-9.0	9.00	0.50	0.60	0.70	50
MJ-FGS-10.0	10.00	0.50	0.60	0.70	50
MJ-FGS-11.0	11.00	0.50	0.60	0.70	50
MJ-FGS-12.0	12.00	0.50	0.60	0.70	50
MJ-FGS-13.0	13.00	0.50	0.60	0.70	50
MJ-FGS-14.0	14.00	0.50	0.60	0.70	50
MJ-FGS-15.0	15.00	0.50	0.60	0.70	50
MJ-FGS-16.0	16.00	0.50	0.60	0.70	50



Physical Properties

Sleeve Material:Fiberglass Fiber

Coated Layer Material:Silicone

Working Temperature:-60°C to 200°C

Voltage Rating:1.5KV,2.5KV,4.0KV

Standard Color:White

Certification:ROHS,UL

Cutting Tool:Scissor



Aluminum Foil Fiberglass Sleeve

Features

1. Aluminum outer layer laminate to reflect heat
2. Fiberglass inner layer to Insulate and protect fragile contents from thermal damage failure
3. RoHS Compliant
4. Resistant to Gasoline & Engine Chemicals
5. Can be easily cut with sharp household scissors

DATA SHEET

PART NO	NOMINAL SIZE(mm)		THICKNESS (mm)	Max Bundle Dia(mm)	PACKING (M/SPOOL)
	ID	Flat Width			
MJ-AFFS010	10.0	19.0	1.00	11.0	50
MJ-AFFS016	16.0	29.0		17.0	50
MJ-AFFS020	20.0	35.0		21.0	50
MJ-AFFS025	25.0	43.0		26.0	50
MJ-AFFS030	30.0	51.0		31.0	50
MJ-AFFS035	35.0	59.0		36.0	50



Physical Properties

Outer Layer Material:High Temperature Aluminum Foil

Inner Layer Material:Fiberglass Fiber

Working Temperature:-50°C to 200°C

Standard Color:Siiver

Certification:ROHS

Cutting Tool:Scissor



Wire Loom Tubing

Features

1. Ideal for creating wire harnesses as well as protecting, hiding, and managing cables in a wide array of applications
2. Prevent tampering and penetration by liquids, dust, and other contaminants
3. Easy installation
4. Corrugated heavy plastic construction resists crushing and abrasion for reliable protection
5. Cut and abrasion resistant

DATA SHAAT

PART NO			SIZE ID*OD (MM)	Bending Radius (R+(-)10%)	PACKING
PE MATERIAL	PP MATERIAL	PA MATERIAL			(M/L)
MJ-WLES-7	MJ-WLPS-7	MJ-WLAS-7	4.5*7.0	5.0	200m/spool
MJ-WLES-8.5	MJ-WLPS-8.5	MJ-WLAS-8.5	5.5*8.5	8.0	100m/spool
MJ-WLES-10	MJ-WLPS-10	MJ-WLAS-10	7.0*10.0	10.0	100m/spool
MJ-WLES-12	MJ-WLPS-12	MJ-WLAS-12	8.5*11.5	15.0	100m/spool
MJ-WLES-13	MJ-WLPS-13	MJ-WLAS-13	10.0*13.0	20.0	100m/spool
MJ-WLES-15.8	MJ-WLPS-15.8	MJ-WLAS-15.8	12.0*15.8	30.0	100m/spool
MJ-WLES-18.5	MJ-WLPS-18.5	MJ-WLAS-18.5	14.3*18.5	40.0	100m/spool
MJ-WLES-21.2	MJ-WLPS-21.2	MJ-WLAS-21.2	17.0*21.2	45.0	100m/spool
MJ-WLES-25.0	MJ-WLPS-25	MJ-WLAS-25	21.0*25.0	50.0	100m/spool
MJ-WLES-28.5	MJ-WLPS-28.5	MJ-WLAS-28.5	23.0*28.5	55.0	50m/spool
MJ-WLES-34.5	MJ-WLPS-34.5	MJ-WLAS-34.5	29.0*34.5	60.0	50m/spool
MJ-WLES-42.5	MJ-WLPS-42.5	MJ-WLAS-42.5	36.0*42.5	70.0	25m/spool
MJ-WLES-54.5	MJ-WLPS-54.5	MJ-WLAS-54.5	48.0*54.5	80.0	25m/spool



Physical Properties

Material:PE,PP,PA

Style:None Split,Split

Working Temperature:

PE:-40°C to 90°C

PP:-30°C to 120°C

PA:-40°C to 130°C

Flammability:PE-None,PP/PA-Yes

Standard Color:Black

Certification:ROHS

Cutting Tool:Scissor



Aluminum Foil Heat Reflective Corrugated Conduit

Features

1. Protects from radiant heat by reflecting 95% of the heat that contacts its surface.
2. High bulk fiberglass for higher thermal insulation value.
3. Cuts cleanly.
4. Protects wiring, cables and hoses from radiant and convective heat.
5. Excellent automotive under-hood protection.

DATA SHEET				
PART NO	ID (mm)	OD(mm)	THICKNESS (mm)	PACKING (L)
MJ-ACWL009	9±0.3mm	12.0±0.5mm	0.11mm	1m/pc
MJ-ACWL012	12±0.3mm	15.0±0.5mm		
MJ-ACWL014	14±0.3mm	17.0±0.5mm		
MJ-ACWL016	16±0.3mm	19.0±0.5mm		
MJ-ACWL018	18±0.3mm	21.0±0.5mm		
MJ-ACWL020	20±0.3mm	23.0±0.5mm		
MJ-ACWL022	22±0.3mm	25.8±0.5mm		
MJ-ACWL025	25±0.3mm	28.7±0.5mm		
MJ-ACWL028	28±0.3mm	31.8±0.5mm		
MJ-ACWL032	32±0.3mm	35.9±0.5mm		
MJ-ACWL040	40±0.3mm	43.8±0.5mm		
MJ-ACWL060	60±0.3mm	63.8±0.5mm		
MJ-ACWL080	80±0.3mm	83.8±0.5mm		



Physical Properties

Material:Aluminum foil and fiberglass yarn

Working Temperature:-50°C to 200°C

Standard Color:Siiver

Certification:ROHS

Cutting Tool:Scissor



PVC Coated Galvanized Steel Flexible Metal Cond

Features

1. Made of Galvanized Steel Strip with Spiral design, special insulation treated and covered with refined PVC coating (Polyvinyl chloride)
2. Water-proof, Corrosion Resistant, UV Resistant, Flame Retardant, Good Bending Performance, RoHS Compliant
3. Single-buckle type structure to increase tensile strength. Not easy to break off or deform | Good flexibility and smooth inner structure to keep cables and wires running through easily
4. This conduit is ideal for static and dynamic applications requiring high mechanical protection and high flexibility



Physical Properties

Tube Material: Stainless Steel

Coating Material: Polyvinyl Chloride (PVC)

Working Temperature: -10°C to 80°C

Flammability: UL94 V2

Standard Color: Black

Certification: ROHS

Cutting Tool: Pliers

DATA SHEET				
PART NO	SIZE		Bending Radius (R+(-)10%)	PACKING (M/Spool)
	ID(mm)	OD(mm)		
MJ-MWL004	4.0	7.0	30.0	200
MJ-MWL006	6.0	9.0	40.0	200
MJ-MWL008	8.0	11.8	45.0	100
MJ-MWL010	10.0	14.5	55.0	100
MJ-MWL012	12.0	16.5	60.0	100
MJ-MWL013	13.0	17.5	65.0	100
MJ-MWL015	15.0	20.2	80.0	100
MJ-MWL016	16.0	21.2	85.0	100
MJ-MWL019	19.0	24.5	95.0	50
MJ-MWL020	20.0	25.5	100.0	50
MJ-MWL025	25.0	31.7	115.0	50
MJ-MWL032	32.0	39.6	140.0	50
MJ-MWL038	38.0	46.6	160.0	50
MJ-MWL051	51.0	59.5	190.0	25
MJ-MWL064	64.0	73.5	280.0	20
MJ-MWL075	75.0	84.5	320.0	20
MJ-MWL100	100.0	109.0	340.0	20
MJ-MWL125	125.0	136.0	360.0	5
MJ-MWL150	150.0	161.0	400.0	5



Explosive Proof LT Flexible Conduit

Features

- Galvanized steel, square-locked core with cord packing to give additional strength to prevent unravelling
- Smooth wipe clean PVC jacketed, wire braiding.
- Liquid-tight IP66/IP67
- Good flexibility
- High mechanical strength
- Flame retardant, explosive- proof.
- UV protection, moisture proof
- Resistance to most of chemicals, such as oil, acids and vapours, etc.
- Good Absorption of motion and vibration
- Cover does not wrinkle when bent

DATA SHEET

Part No	Nominal Size ISO (mm)	Nominal Size US (Inches)	I.D. (mm)	O.D. (mm)	Min. Bend Radius (mm)	Length(M/coil)
MJ-EPMC-13	16	3/8"	12.3 - 12.8	18.5 - 19.0	75	50
MJ-EPMC-11	20	1/2"	15.7 - 16.3	21.8 - 22.3	95	50
MJ-EPMC-12	25	3/4"	20.7 - 21.2	26.2 - 27.7	120	30
MJ-EPMC-13	32	1"	26.2 - 26.8	33.8 - 34.4	180	30
MJ-EPMC-14	40	1-1/4"	34.7 - 35.4	42.4 - 43.2	230	20
MJ-EPMC-15	50	1-1/2"	40.0 - 40.6	48.4 - 49.3	270	20
MJ-EPMC-16	63	2"	51.3 - 51.9	60.4 - 61.3	300	15
MJ-EPMC-17	75	2-1/2"	62.9 - 63.6	73.1 - 74.0	350	10
MJ-EPMC-18	90	3"	77.9 - 78.7	88.9 - 89.9	500	10
MJ-EPMC-19	100	4"	101.6 - 102.6	114.3 - 115.3	650	5



Physical Properties

- Tube Material:** Stainless Steel
- Coating Material:** Polyvinyl Chloride (PVC)
- Working Temperature:** -10°C to 80°C
- Flammability:** UL94 V2
- Standard Color:** Black
- Certification:** ROHS
- Cutting Tool:** Pliers



Nylon Zip Cable Ties

Features

- 1.Strong and Durable
- 2.Premium Quality
- 3.Self-locking Design
- 4.Heat and UV Resistan
- 5.Easy installation
- 6.Widely Used

DATA SHEET

PART NO	SIZE W*L (mm)	PACKING	PART NO	SIZE W*L (mm)	PACKING	PART NO	SIZE W*L (mm)	PACKING
		(PCS/BAG)			(PCS/BAG)			(PCS/BAG)
MJ-NZC103-01	2.2x60	100	MJ-NZC103-19	4.8X160	100	MJ-NZC103-37	7.6x450	100
MJ-NZC103-02	2.5 x 80	100	MJ-NZC103-20	4.8X180	100	MJ-NZC103-38	7.6x500	100
MJ-NZC103-03	2.5x100	100	MJ-NZC103-21	4.8x200	100	MJ-NZC103-39	7.6x550	100
MJ-NZC103-04	2.5x120	100	MJ-NZC103-22	4.8x250	100	MJ-NZC103-40	7.6x650	100
MJ-NZC103-05	2.5x150	100	MJ-NZC103-23	4.8x300	100	MJ-NZC103-41	9x400	100
MJ-NZC103-06	2.5x160	100	MJ-NZC103-24	4.8x350	100	MJ-NZC103-42	9x450	100
MJ-NZC103-07	2.5x200	100	MJ-NZC103-25	4.8x370	100	MJ-NZC103-43	9x500	100
MJ-NZC103-08	3.6x100	100	MJ-NZC103-26	4.8x400	100	MJ-NZC103-44	9x550	100
MJ-NZC103-09	3.6x120	100	MJ-NZC103-27	4.8x450	100	MJ-NZC103-45	9x600	100
MJ-NZC103-10	3.6x150	100	MJ-NZC103-28	4.8x500	100	MJ-NZC103-46	9x650	100
MJ-NZC103-11	3.6x180	100	MJ-NZC103-29	4.8x550	100	MJ-NZC103-47	9x700	100
MJ-NZC103-12	3.6x200	100	MJ-NZC103-30	4.8x650	100	MJ-NZC103-48	9x760	100
MJ-NZC103-13	3.6x250	100	MJ-NZC103-31	7.6x200	100	MJ-NZC103-49	9x800	100
MJ-NZC103-14	3.6x300	100	MJ-NZC103-32	7.6x250	100	MJ-NZC103-50	9X850	100
MJ-NZC103-15	3.6x370	100	MJ-NZC103-33	7.6x300	100	MJ-NZC103-51	9x900	100
MJ-NZC103-16	4.5x100	100	MJ-NZC103-34	7.6x350	100	MJ-NZC103-52	9x1000	100
MJ-NZC103-17	4.5x120	100	MJ-NZC103-35	7.6x370	100	MJ-NZC103-53	9x1200	100
MJ-NZC103-18	4.5x150	100	MJ-NZC103-36	7.6x400	100	MJ-NZC103-54	12x650	100



Physical Properties

Material:PA 66

Style:Self-Locking

Working Temperature:-40°C to 130°C

Tensile Strength:45 Lbs (20kgs)

Flammability:VW-2

Standard Color:Black,White

Certification:ROHS



Hook and Loop Cable Tie Roll

Features

- 1.High quality cable ties
- 2.Reusable over 1000 times, durable
- 3.Heavy duty reliable
- 4.Very easy to find the line,saving time and effort
- 5.Nylon construction will not degrade or Interfere with data transmission
- 6.No sharp edges as found on trimmed cable ties

DATA SHEET

PART NO	SIZE (W)		THICKNESS (MM)	PACKING (M/SPOOL)
	MM	INCH		
MJ-HLCT-N1025	10mm	3/8"	2mm	25m/spool 10m/spool 5m/spool 3m/spool
MJ-HLCT-N1225	12.5mm	1/2"		
MJ-HLCT-N1625	16mm	5/8"		
MJ-HLCT-N2025	20mm	3/4"		
MJ-HLCT-N2525	25mm	1"		
MJ-HLCT-N3025	30mm	1-1/4"		
MJ-HLCT-N3825	38mm	1-1/2"		
MJ-HLCT-N5025	50mm	2"		
MJ-HLCT-N6025	60mm	2-2/5"		
MJ-HLCT-N7525	75mm	3"		
MJ-HLCT-N8025	80mm	3-1/5"		
MJ-HLCT-N10025	100mm	4"		



Physical Properties

Material:Nylom

Style:Back to Back

Working Temperature:-40°C to 130°C

Tensile Strength:45 Lbs (20kgs)

Flammability:None

Standard Color:Black,White

Certification:ROHS,Reach,Oeko-Tex100



Thin Plastic Hook and Loop Cable Tie Roll

Features

1. According to the need to control the length, just cut it, you can use it immediately, not wasting
2. Casual tailoring, random length
3. Flexible to use, the sticker is tight and easier to use
4. Using high quality nylon material, high toughness, strong adhesion, convenient and more practical
5. Can be widely used for lots of scene, such as cables sorting, clothing sorting, book sorting, box sorting and etc



DATA SHEET

PART NO	SIZE (W)		THICKNESS (MM)	PACKING (M/SPOOL)
	MM	INCH		
MJ-HLCT-P1025	10mm	3/8"	1.5mm	25Yards/Spool 10Yards/Spool 5Yards/Spool 3Yards/Spool
MJ-HLCT-P1225	12.5mm	1/2"		
MJ-HLCT-P1625	16mm	5/8"		
MJ-HLCT-P2025	20mm	3/4"		
MJ-HLCT-P2525	25mm	1"		
MJ-HLCT-P3025	30mm	1-1/4"		
MJ-HLCT-P3825	38mm	1-1/2"		
MJ-HLCT-P5025	50mm	2"		
MJ-HLCT-P6025	60mm	2-2/5"		
MJ-HLCT-P7525	75mm	3"		
MJ-HLCT-P8025	80mm	3-1/5"		
MJ-HLCT-P10025	100mm	4"		

Physical Properties

Material: Nylon Injection hook+Velour loop

Style: Back to Back

Working Temperature: -40°C to 130°C

Tensile Strength: 70 Lbs (31kgs)

Flammability: None

Standard Color: Black, White, Blue, Green, Red, Yellow

Certification: ROHS, Reach, Oeko-Tex100



Self Adhesive Hook and Loop

Features

1. Widely application
2. Strong adhesive, super Stickability
3. Decent sizes & lengths
4. Powerful holding ability
5. Can be used over 10,000 times.
6. High temperature and water resistant

DATA SHEET

PART NO	SIZE (W)		THICKNESS (MM)	PACKING (M/SPOOL)
	MM	INCH		
MJ-HLCT-A1025	10mm	3/8"	2mm	25m/spool 10m/spool 5m/spool 3m/spool
MJ-HLCT-A1225	12.5mm	1/2"		
MJ-HLCT-A1625	16mm	5/8"		
MJ-HLCT-A2025	20mm	3/4"		
MJ-HLCT-A2525	25mm	1"		
MJ-HLCT-A3025	30mm	1-1/4"		
MJ-HLCT-A3825	38mm	1-1/2"		
MJ-HLCT-A5025	50mm	2"		
MJ-HLCT-A6025	60mm	2-2/5"		
MJ-HLCT-A7525	75mm	3"		
MJ-HLCT-A8025	80mm	3-1/5"		
MJ-HLCT-A10025	100mm	4"		



Physical Properties

Material: Nylon, Nylon+Polyester

Adhesive Style: High Temperature, Hot Melt, Arcylic, 3M

Working Temperature: -10°C to 80°C

Flammability: None

Standard Color: Black, White

Certification: ROHS, Reach, Oeko-Tex100



Hook and Loop Cinch Strap

Features

1. Lightweight and easy connection with strong fastener.
2. Fully adjustable along strap length. The cable ties are easy to remove or replace due to the self-adhesive design closure.
3. Hook and loop fastening wrap strap with plastic buckle end.
3. Our cable ties can quickly secure your cable runs for your audio/video equipment stack, computer desk or networking closet etc.
4. Can be used with all types of cables such as Speaker cables, TV cables, USB cables, Power cables, Computer cables, Cell Phone chargers, Audio cables etc.
5. Available for different sizes, allow for easy insertion and tightening of straps.

Size

Custom Size

Custom Logo

Available



Physical Properties

Material: Nylon, Nylon+Polyester

Adhesive Style: High Temperature, Hot Melt, Arcylic, 3M

Working Temperature: -40°C to 130°C

Flammability: None

Standard Color: Black, White

Certification: ROHS, Reach, Oeko-Tex100



Hook and Loop Cable Strap

Features

Flexibility

Include an eye hole in the tail allowing the tie to be attached to a cable or hung from a hook. Take control of cord clutter. Simply wrap around the cable, then the job is done. It's so simple and easy to use.

Easy to Use

Organizing cables couldn't be easier. It is much better than plastic cable ties and you do not need to trim it. Gather them together, wrap the durable cable wraps around them tightly. The cable wrap opens and closes easily and quickly so you can add or remove cables.

Dual-use

These cable ties are made of a self-attaching hook and loop material popularized by products, reusable and durable. They can be for front and back dual-use.

Versatility

They can be used to tie up speaker cables, guitar cables, TV cables, microphone mic, computer cables, and much more. It is ideal for keeping all kinds of cords cables well organized and tidy in place.

Size

Custom Size

Custom Logo

Available



Physical Properties

Material:Nylon Hook+Velour loop

Working Temperature:-40°C to 130°C

Flammability:None

Standard Color:Black,White

Certification:ROHS,Reach,Oeko-Tex100



Contact Us



闽骏工业科技
MJ INDUSTRIAL TECH

Xiamen MJ Industrial Tech Co.,Ltd

Add:N0 62-3,Lian Hua She,Lian Hua Community,Dongfu Street,Haicang
Dist,Xiamen,Fujian,China 361027

Tel:86-592-6053775

Mob:86-18059898415

Email:info@mj-ist.com

Http://www.mj-flex.com/